

GeoGrid



- **Quick and easy to install**
with simple interlocking design
- **Durable and lightweight**
- Withstands loads up to
500 tonnes per sqm
- **Expansion and contraction**
avoids risk of surface deformation
in hot or cold temperatures
- Ideal for integration into
**Sustainable Urban Drainage
Systems (SUDS)**
- Made from **100%
recycled polyethylene**
- Available in **Premium
or Standard options**

With a cellular grid design that allows rain or flood water to disperse quickly, the GeoGrid paving system is the fast, efficient way to reinforce your ground.

GeoGrid




Ideal as a driveway



Fast, efficient ground reinforcement

Strong cellular grid withstands loads up to 500 tonnes

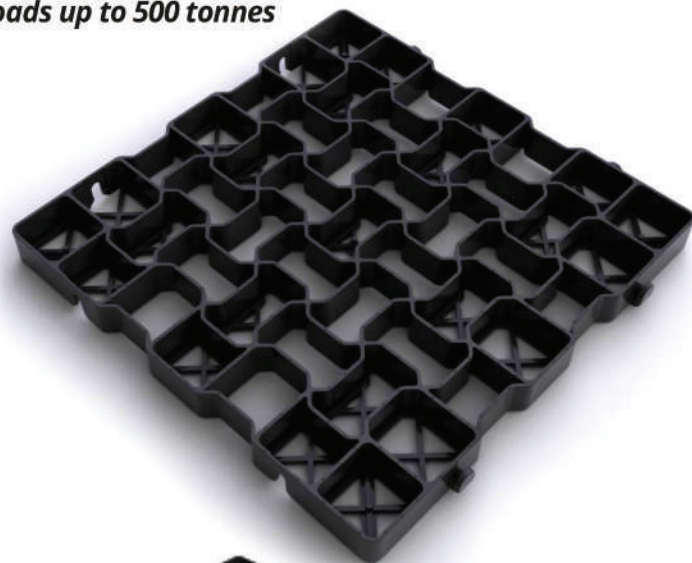

Infill with decorative stones or seed with grass

Length:	495mm
Width:	495mm
Thickness:	40mm
Weight:	1.1kg (Standard) 1.6kg (Premium)
Point load:	25 tonnes (Standard) 35 tonnes (Premium)
Weight loading:	350 tonnes (Standard) 500 tonnes (Premium)

Applications

- Pathways and driveways
- New and overflow car parks
- Ground reinforcement and stabilisation
- Pedestrian access routes
- Access roads
- Event parking
- Road extensions
- Infiltration basins
- Storage areas
- Gateway areas